



Accessories

P • B • S • C • W • M Systems


Edition 01-2025
EN


Index

Effective 01.01.2025

Accessories

P system	pag. 04
B system	pag. 05
S system	pag. 06
C system	pag. 07
W system	pag. 09
M system	pag. 10
1. Power Supplies	pag. 11
2. Controls (Standard)	pag. 12
3. Controls (KNX)	pag. 13
4. Controls (RF)	pag. 13
5. Cables	pag. 14
6. Accessories	pag. 15
7. Automation	pag. 16
Spacer bars	pag. 17

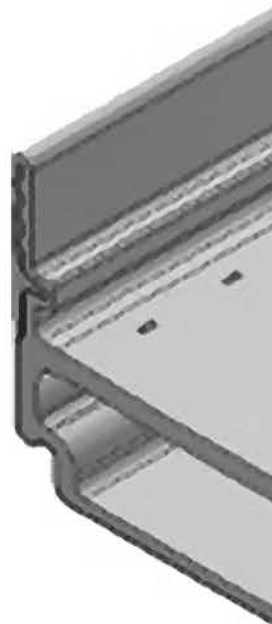

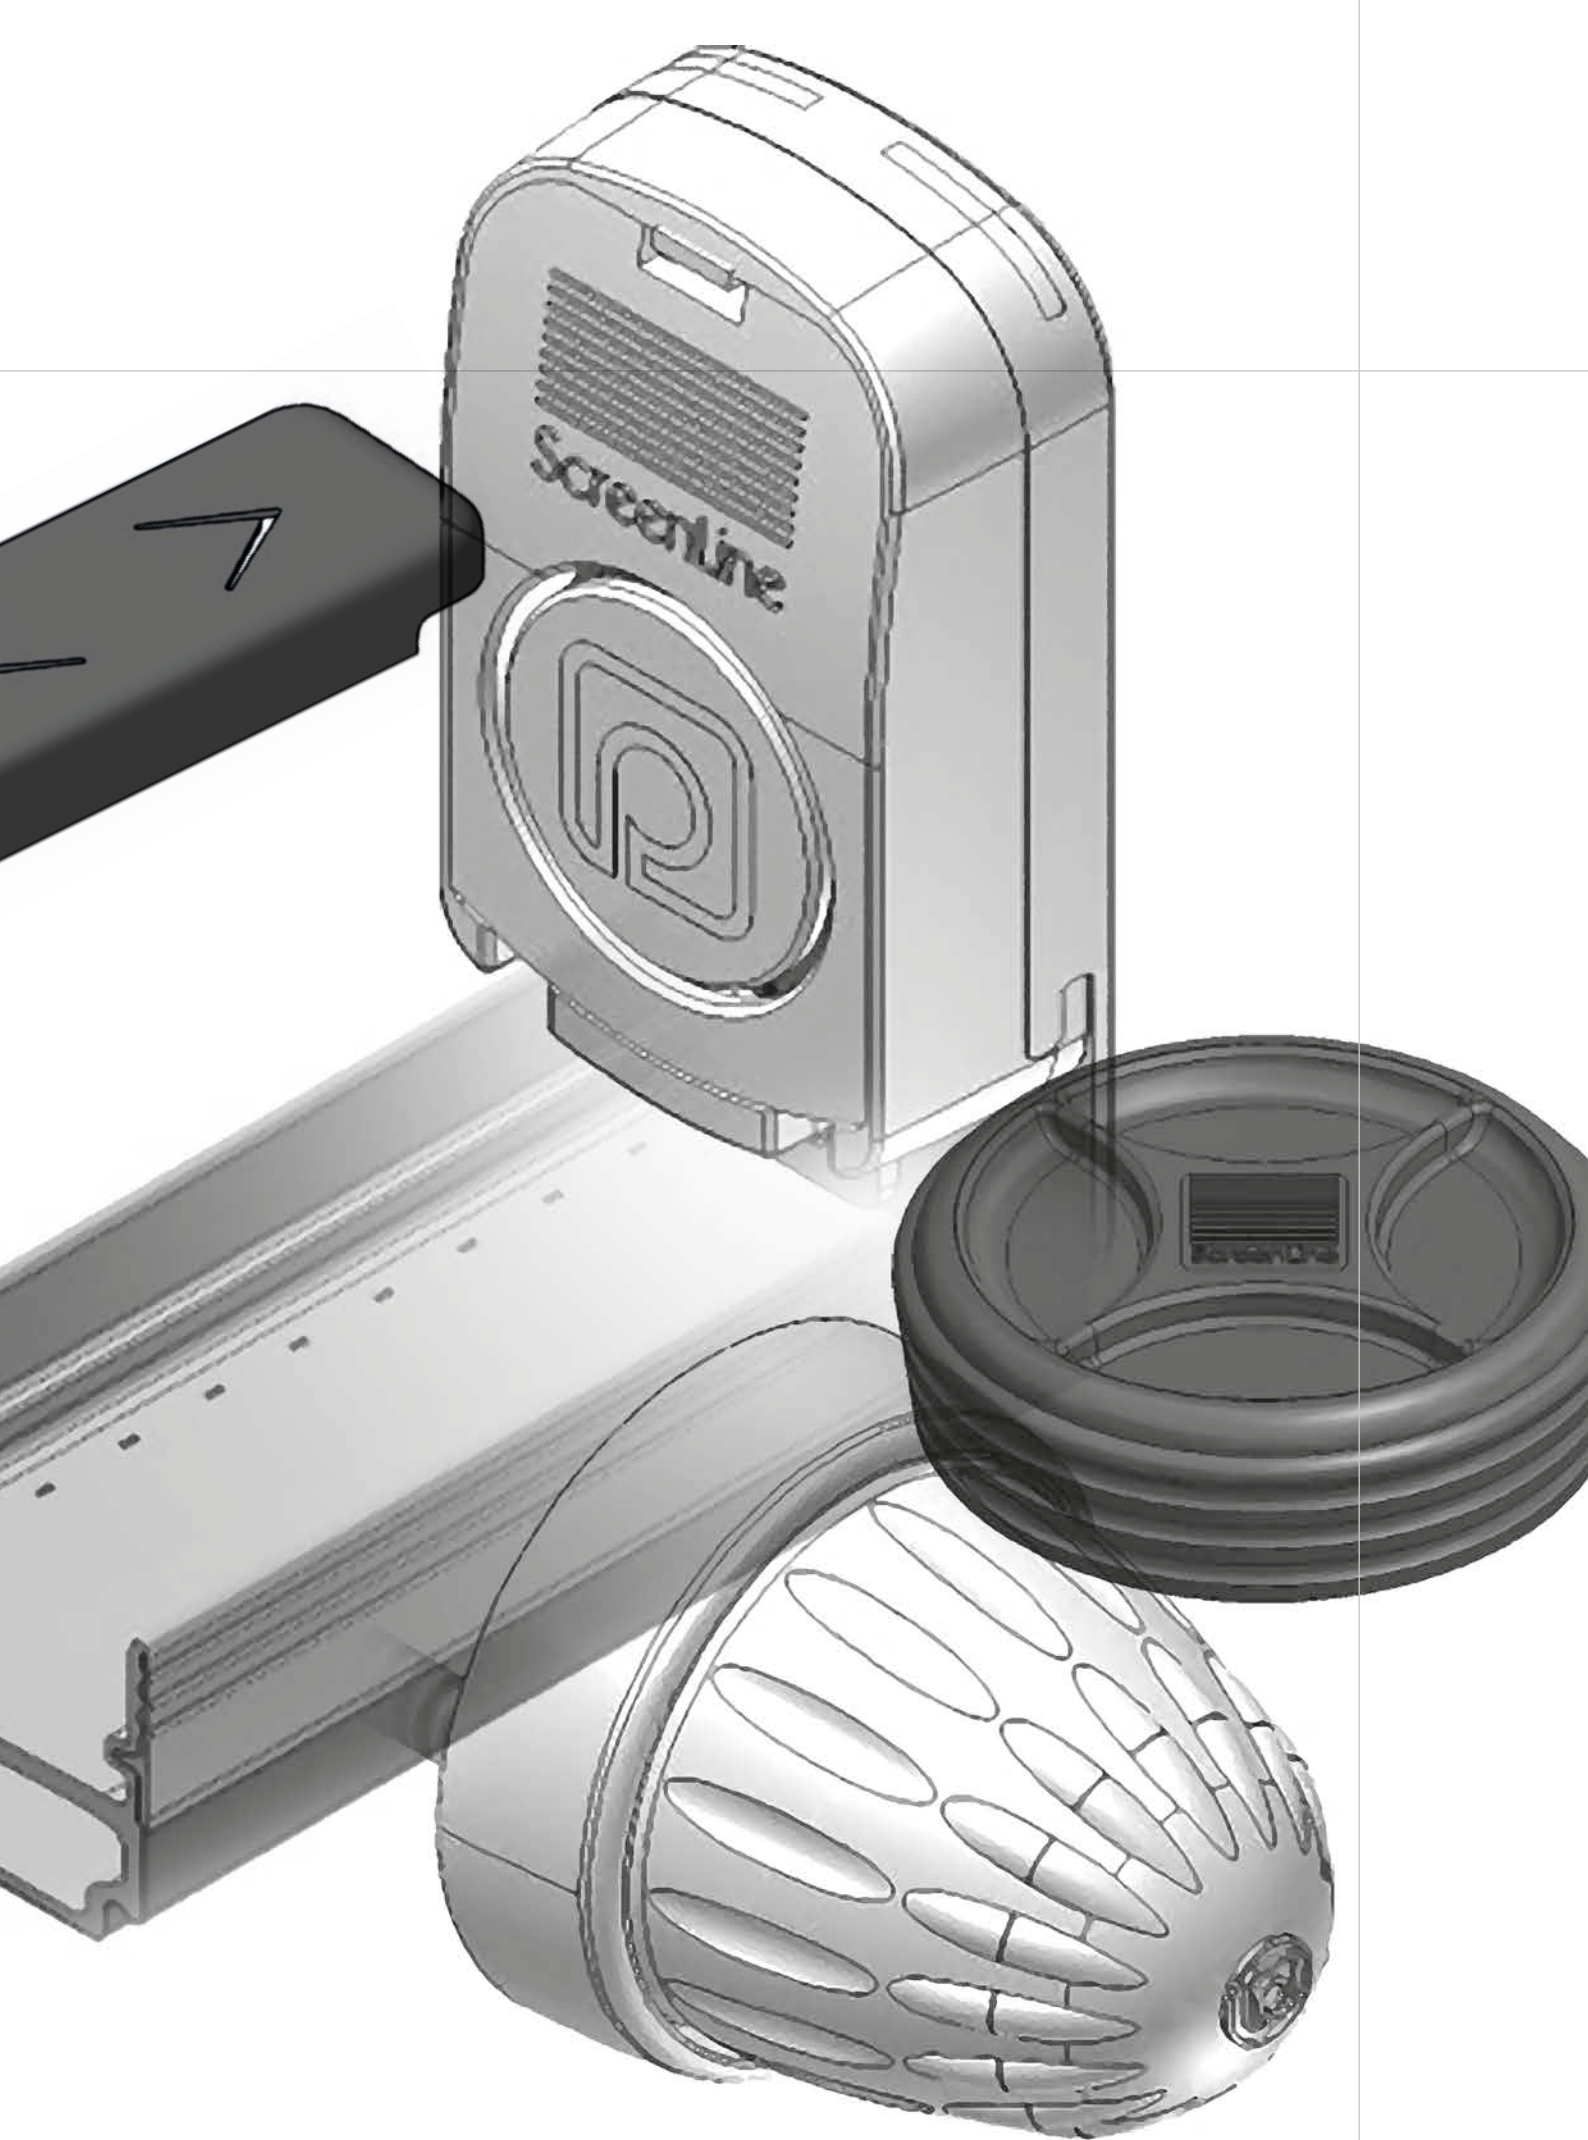

P system



Assembled flexible cable

SL1136 L=500 mm

SL1137 L=1000 mm

SL1138 L=1500 mm

SL1139 L=2000 mm

SL1867 L=2500 mm

SL1551 L=3000 mm



Antiligature knob

SL2161S155 grey

SL2161S102 white

SL2161B160 black

SL2161S157 silver

SL2159 steel



SL1332

Hidden knob



SL1920

Key for hidden knob



SL1781

Protection caps for secondary sealing



SL2569

Dual knob transmission device

B system



Round knob
SL2248S155 grey
SL2248S102 white



Slim knob
SL2110S155 grey
SL2110S102 white



Tilt-only slim knob
SL2606S155 grey
SL2606S102 white



SL2972
High-speed knob - grey



SL2971
Adhesive tape for high-speed knob

S system



SL2745

Sliding external magnetic device (Pleated)



SL2526

Transparent end stop for external slider Rev. 1



External slider

SL2486S157 grey

SL2486S102 white

SL2486S149 beige



External slider equipped with wand

SL3105S157 grey

SL3105S102 white

H = 500 mm

H = 1000 mm

H = 1500 mm

H = 2000 mm

H = 2500 mm

H = 3000 mm



SL2469

Transparent adhesive guide



SL2615L100

Template for adhesive guide L = 100 mm



SL2525

Desiccant filling tool



SL2652

Sliding system testing device

C system



CE

Kit consisting of external magnetic device SL2240, cord loop SL1011 and cord tensioner SL1647, available in 7 colours and all lengths in compliance with standard EN13120



Cord loop

SL1647C011 white

SL1647C018 light blue

SL1647C013 cream

SL1647C061 grey

SL1647C128 yellow

SL1647C098 green



SL2239S000

Double-sided adhesive tape for 31-mm external magnetic device



SL1897S000

Double-sided adhesive tape for cord tensioner



31-mm diam. external magnetic device

SL2240S000 transparent

SL2240S102 white

SL2240S106 yellow

SL2240S130 green

SL2240S142 light blue

SL2240S149 cream

SL2240S155 grey



Cord tensioner

SL1899S000 transparent

SL1899S102 white

SL1899S106 yellow

SL1899S130 green

SL1899S142 light blue

SL1899S149 cream

SL1899S155 grey



Double-sided adhesive tape for wand control device

SL1017 transparent


SL1017S160 black



Wand external magnetic device
SL1032S000 transparent
SL1032S102 white
SL1032S160 black



High-speed control device for transparent and aluminium wand
SL2635S102 white
SL2635S155 grey



SL1033
Transparent wand control device



Aluminium wand control device
SL19170500 H = 500 mm
SL19171000 H = 1000 mm
SL19171500 H = 1500 mm
SL19172000 H = 2000 mm
SL19172500 H = 2500 mm
SL19173000 H = 3000 mm




Round knob
SL2248S155 grey
SL2248S102 white



External motor (after sales)
SL2190S155 grey
SL2190S102 white
SL2190B160 black



SL2200
Double-sided adhesive tape for external motor



Transmission device for triple glazing
SL2364 10 mm
SL2365 12 mm
SL2366 14 mm
SL2367 16 mm
SL2387 20 mm

For accessories related to "C" systems when used in combination with the external motor,
refer to "M" system accessories

W system



Battery module with built-in receiver

SL2776S157 silver

SL2776S102 white

SL2776S159 anthracite grey

SL2776B160 black



SL1084B160

Solar panel black



Battery charger

SL2405EU with European plug

SL2405UK with British plug

SL2405US with American plug

SL2405AU with Australian plug



SL3192

Radio remote control

Portable radio transmitter with LED display for up to 32 channels. Colour: white



SL2767

Upper adhesive strip for SL2379 battery module support



SL2768

Lower adhesive strip for SL2379 battery module support



Battery module support
SL2775S157 silver
SL2775S102 white
SL2775S159 anthracite grey
SL2775B160 black



Test kit for W systems
SL2420-EU with European plug
SL2420-UK with British plug
SL2420-US with American plug
SL2420-AU with Australian plug



SL2417
Carving tool for secondary sealant



SL2396
Cable for external connection of W motor L=1500 mm


M system

See overleaf

1. Power Supplies



SL2711 Rev. 1
Switching Power Supply 24V dc 1.3A
DIN rail mounting
Dim.: 2 modules 35x90x54.5 mm (WxHxD)



SL2712 Rev. 1
Switching Power Supply 24V dc 2.5 A
DIN rail mounting
Dim.: 3 modules 52.5x90x54.5 mm (WxHxD)



SL2713 Rev. 1
Switching Power Supply 24V dc 4.2 A
DIN rail mounting
Dim.: 4 modules 70x90x54.5 mm (WxHxD)




SL2873 Rev. 1
Switching Power Supply 24V dc 6.25 A
DIN rail mounting
Dim.: 6 modules 105x90x54.5 mm



ST1811
Power Supply for configuration, test and assembly of 2-wire and 3-wire 24V dc blinds.
Allows connection with CTS software.
With control-LED for main voltage and communication



ST2901
Interface cable with test kit ST1811 for connection with PC on which the CTS software is installed

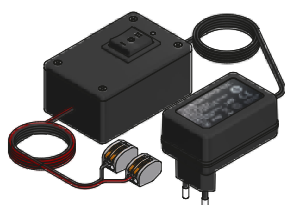

SL2534
Test kit for 24V dc systems
Power Supply for testing of only 2-wire 24V dc motorised blinds on building site



ST1821
Test kit for assembly and test of 3-wire 24V dc internal motor blinds
Performs the up/down/tilting movements and referencing standard without PC in association with test kit ST1811 (required)

2. Controls (Standard)



ST2121

Control Module 1 group of blinds (PC configuration)

Control relay for control of up to 4 MB blinds or max 2 external motor blinds in one group
Remote control input for superordinate group control (Potential separated)
Individually configurable via Configuration Utility (PC)
DIN rail mounting
Dim. 1 module 18x90x61 mm (WxHxD)



ST2124

Control Module 4 groups of blinds (PC configuration)

Control relay for control of up to 16 MB blinds in 4 groups (4x4 blinds) or max 8 external motor blinds (4x2 blind)
Remote control input for superordinate group control (Potential separated)
Individually configurable via Configuration Utility (PC)
DIN rail mounting
Dim.: 4 modules 71x91x62 mm (WxHxD)



ST2128

Current amplifier (ex item ST2821)

Expansion of a power output control for max 16 MB blinds or max 8 external motor blinds in one group
Only to use with a control module and power supply
DIN rail mounting
Dim.: 2 Modules 35x91x62 mm (WxHxD)



SL3107

Control unit for up to 4 Venetian blinds equipped with DIN rail support SL3051.

Control relay for control of groups of blinds with raising or lowering function.
Dim.: 48x43x21 mm (LxHxD) - 2 DIN modules



SL3051

DIN rail support

3. Controls (KNX)



ST3124

KNX 2-wire blind Actuator 4 groups of 24V dc blinds

4 control groups with max. 4 blinds at a time each

DIN rail mounting

Dim.: 4 modules 71x91x62 mm (WxHxD)



ST3134

KNX compatible blind Actuator for control of 24V dc integrated blinds

4 control groups with max 1 blind at a time each

DIN rail mounting

Dim.: 4 modules 71x91x62 mm (WxHxD)



ST2134

LAN 3-wire blind Actuator - 4 x 24V dc blinds

Control module for 3-wire integrated blinds

4 control groups with max 1 blind each

Input: LAN

DIN rail mounting

Dim. 4 modules 72x90x60 mm (WxHxD)

4. Controls (RF)



SL3163

Control unit with integrated radio receiver for up to 4 blinds with raising or lowering function equipped with DIN rail support SL3051

Dim.: 48x43x21 mm (LxHxD) - 2 DIN modules



SL3051

DIN rail support



SL3192

Radio remote control

Portable radio transmitter with LED display for up to 32 channels. Colour: white

5. Cables

Standard cables



SL2361

Sheathed cable for external connection of M motor

- SL23611000 – L 1 mt (standard)
- SL23612000 – L 2 mt
- SL23613000 – L 3 mt
- SL23615000 – L 5 mt
- SL236110000 – L 10 mt
- SL236115000 – L 15 mt

Optional cables



SL27100300

Motor cable SC (3-wire) 0.3 mt

With (male) connector for connection of motor to other cables
Length: 0.3 mt, cable section: about 4.5 mm
Connector: 6.5x17 mm, 3-wire
Halogen-free.



SL27105000

Connection Cable SC (3-wire) optional 5 mt

With (female) connector for blind-control unit connection.
Length: 5 mt, cable section: about 4.5 mm
Connector: 6.5x17 mm, 3-wire
Halogen-free.



SL271010000

Connection Cable SC (3-wire) optional 10 mt

With (female) connector for blind-control unit connection.
Length: 10 mt, cable section: about 4.5 mm
Connector: 6.5x17 mm, 3-wire
Halogen-free.



SL271020000

Connection Cable SC (3-wire) optional 20 mt

With (female) connector for blind-control unit connection.
Length: 20 mt, cable section: about 4.5 mm
Connector: 6.5x17 mm, 3-wire
Halogen-free.



SL271030000

Connection Cable SC (3-wire) optional 30 mt

With (female) connector for blind-control unit connection.
Length: 30 mt, cable section: about 4.5 mm
Connector: 6.5x17 mm, 3-wire
Halogen-free.



ST8101

Connection Cable SC (3-wire) for connection and extension of the blind cable to the control unit.

Length: 100 mt, cable section: about 4.5 mm. Halogen-free.

ST8110 Connection Cable SC (3-wire) in 1000 mt spool

6. Accessories



SL2444

Set of 3 pieces of one-pole contacts - Grey

One-pole magnetic contacts for transmitting electrical connection and data communication lines on doors and windows in 3-wire motors.

The package contains three couples of contacts

Colours: grey, black (SL2444B160), white (SL2444S102)



ST9201

Cable Junction

Cable Junction for concealed installation in the window recess

For max. 4.5-mm cable diameter



ST5311

Blind Push Button - Black (not suitable for blinds with internal motor)

Blind group control button as built-in version (rocker switch)

Colour: black

Dim.: 25x31.5x29.1 mm (WxHxD)



SL2417

Carving tool for secondary sealant

7. Automation



SL3000

Wise HUB

Blind control device designed to receive inputs from the ScreenLine by Pellini App and send commands to the blinds



SL3000P

Wise HUB Premium

Blind control device designed to receive inputs from the ScreenLine by Pellini App and send commands to the blinds, with possibility of home automation, voice and remote control



ST4801

ScreenTronic App Licence

ScreenTronic App Licence for 1 mobile device.

Can be downloaded free if used in combination with actuator ST2134

Spacer bars



SL1535

55-metre roll of 1x4-mm Butyl tape



SL1715

27 mm C-shaped spacer bar



U-shaped spacer bar

SL1542 20 mm

SL15429005 20 mm black no-dust

SL1773 22 mm

SL17739005 22 mm black no-dust

SL1048 27 mm

SL10480005 27 mm black no-dust

SL1721 32 mm

SL17210000 32 mm no-dust

SL17210005 32 mm black no-dust



Spacer bar with guide

SL1772 22 mm

SL17720005 22 mm black no-dust

SL19140000 27 mm no-dust

SL19140005 27 mm black no-dust

SL1720 32 mm

SL17200000 32 mm no-dust

SL17200005 32 mm black no-dust




L-shaped spacer bar

SL1740 20 mm

SL17400005 20 mm black no-dust

SL1659 24 mm


SL16599005 24 mm black no-dust



flat spacer bar


SL1020 24 mm

SL10209005 24 mm black no-dust



SL1666

27 mm spacer bar with bottom rail guide (Roller system)




Warm edge spacer bar
SL2565 16 mm grey
SL2565B160 16 mm black
SL2419 20 mm grey
SL2419B160 20 mm black
SL2397 22 mm grey
SL2397B160 22 mm black
SL2415B160 29 mm black



Plastic corner key for warm edge spacer bar
SL2578 16 mm grey
SL2434 20 mm grey
SL2398 22 mm black
SL2438 29 mm grey



Plastic corner key for aluminium spacer bar (grey)
SL1708 20 mm
SL1820 22 mm
SL1031 24 mm
SL1013 27 mm
SL1707 32 mm




Plastic corner key for motorised blinds with warm edge spacer bar
SL2447 20 mm with contacts (motor side)
SL2413 22 mm with contacts (motor side)
SL2437 29 mm with contacts (motor side)



Plastic corner key for motorised blinds with aluminium spacer bar
SL2344 22 mm with contacts (motor side)
SL2345 22 mm end stop side
SL2346 22 mm bottom side
SL2354 27 mm with contacts (motor side)
SL2355 27 mm end stop side
SL2356 27 mm bottom side
SL2357 32 mm with contacts (motor side)
SL2358 32 mm end stop side
SL2359 32 mm bottom side



Pre-butyled corner key for warm edge spacer bar
SL2601 20 mm
SL2699 22 mm



ScreenLine[®]
by Pellini

Pellini S.p.A.
26845 Codogno (LO) ITALY
via Fusari, 19
T. +39 0377 466411
F. +39 0377 436001 437635
info@pellini.net
www.pellini.net

Edition 01-2025